




Stratco Cooldek® Roofing

Verandahs | Patios | Walling

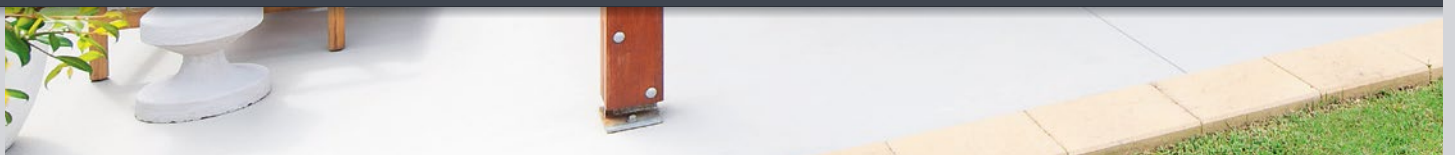

Cooldek® Roofing

Insulated Patio Roofing

Outdoor Living

Experience outdoor comfort under a Stratco Patio with Cooldek® roofing. This innovative insulated panel offers roofing, insulation, and a ceiling-like finish in one product, with excellent cooling performance and spanning capabilities. Extend your outdoor living all year round with Stratco Cooldek.

Insulated Advantage For Cooling Comfort

Stratco Cooldek roofing features EPS insulated core bonded to easy-to-clean coloured steel underside and profiled steel topside, reducing heat from above, minimising noise, and helping keep your home cool.

Impressive Strength, Incredibly Long Spans


With exceptional strength and impressive spanning capability up to 9 metres unsupported, Cooldek minimises beams and framework for a cleaner, spacious appearance. Installation is simple, with an inbuilt rebate to conceal wiring for fans and light fittings. Designed to Australian Standards, Stratco Cooldek ensures quality, strength, and versatility for your outdoor space.

Invest In Cooldek Roofing


- One product to produce that classic steel roof look with a smooth ceiling underside while offering outstanding cooling performance.
- Choice of Cooldek Classic or Cooldek CGI roof profiles.
- Choose from five insulation thicknesses.
- Wide range of popular rooftop colours.
- Ceiling-like underside is available in White.
- Exceptional strength reduces the number of beams and framework required.
- Reduces heat by up to 63% from above on hot days to make your outdoor living area more comfortable.
- Saves on electricity by reducing indoor cooling energy costs and your carbon footprint.
- Cyclonic and non-cyclonic certification.
- Group 1 fire resistance certification up to BAL 29.

Rooftop Profiles

COOLDEK CLASSIC

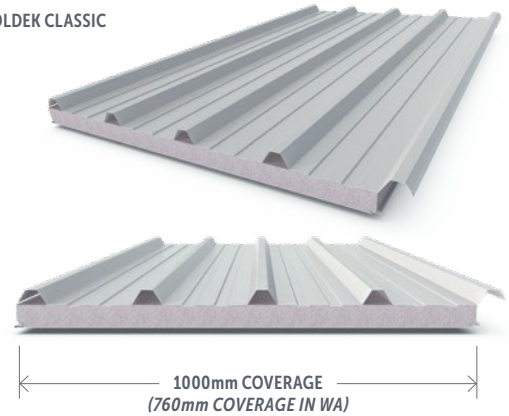

COOLDEK CGI

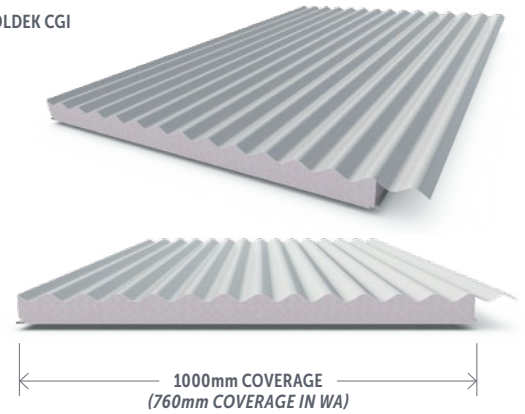


Both profiles are available in 50, 75, 100, 125 or 150mm insulation thickness.


NOTE: All Cooldek sheets are provided at a minimum length of 2000mm. Where Cooldek sheets of less than 2000mm are required they will need to be cut on site.

Underside Profiles

SMOOTH

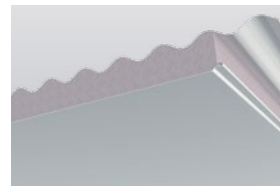


V-GROOVE

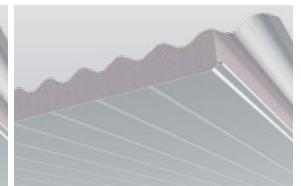

Cooldek Insulation Rating (R Value)

Profile	Mean Temp. (°C)	Panel Thickness (mm)				
		50	75	100	125	150
Classic	0	1.35	2.03	2.70	3.38	4.05
	14	1.27	1.91	2.54	3.18	3.82
	25	1.22	1.83	2.44	3.05	3.66
CGI	0	1.57	2.24	2.92	3.59	4.27
	14	1.48	2.11	2.75	3.38	4.02
	25	1.41	2.02	2.63	3.24	3.85



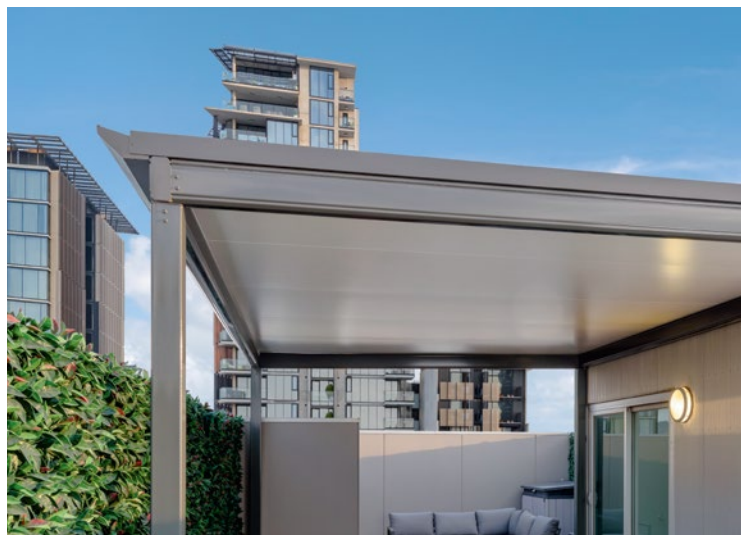

Let In Even More Light With Cooldek Cool Light

- Suitable for all panel profiles, thicknesses and lengths
- Easy to install
- Use on Flat & Gable applications
- 270mm wide for Cooldek Classic and Cooldek CGI

Refer Cool Light Installation Guide for further details.



« SCAN THIS QR CODE TO FIND A STRATCO NEAR YOU

1300 155 155
stratco.com.au

All brands and logos/images accompanied by ® or ™ are trade marks of Stratco (Australia) Pty Limited. © Copyright May 2013

How To.

